


Fremont 65H Pneumatic Heat Assist Laminator



The Fremont 65H features pneumatic roller nip pressure adjustment plus heat assist capability all within a compact design. With a maximum of 1.2 inch roller gap, the Fremont 65H is sure to handle your most complex and demanding laminating and mounting requirements.

Features

- Heavy duty motor for lamination speed of up to 20 feet per minute
- Pneumatic air pressurized rollers provide evenly distributed roll pressure
- Crowned silicon rollers ensure proper tracking and last longer than rubber rollers
- Roll-To-Roll capability with integrated front feed and rear rewriter included

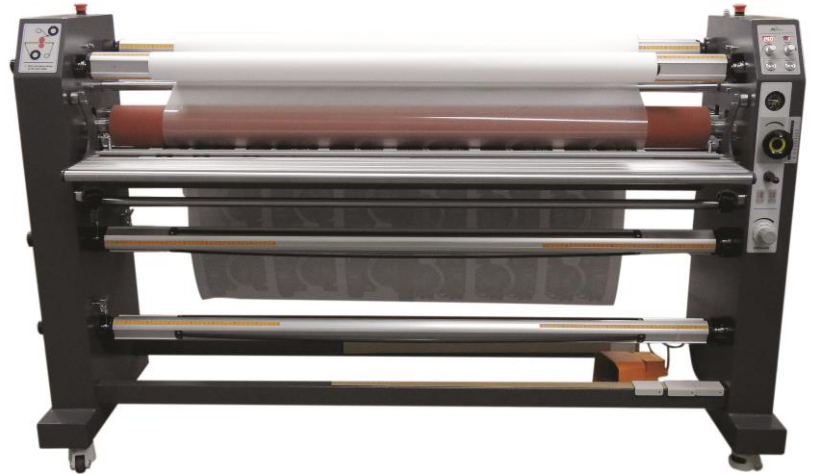

Specifications

Maximum Lamination Width	65(in)
Maximum Roller Nip Height	1.2(in)
Lamination Speed	Variable 0-20(fpm)
Heat Assist	Heated Top Roller
Maximum Top Roller Temperature	122 F
Maximum Material Diameter	7.9(in)
Foot Pedal	Yes
Rear Wired Remote	Yes
Reverse	Yes
Pressure Adjustment	Pneumatic
Take Up System	Yes
Rear Rewinder	Yes
Front Feed Table	Tilt Up
Film Core Size	3(in)
Shaft - Roll Alignment Guides	Yes
Power Supply	120V
Power Consumption	1450W
Unit Dimensions (WxDxH)	84(in) x 25(in) x 52(in)
Unit Weight	617(lbs)
Crate Dimensions (WxDxH)	90(in) x 34(in) x 63(in)
Crate Weight	1098(lbs)
Warranty	1 year parts/labor



Specifications subject to change